



SERVICE PARTS LIST

BULLETIN NO.
54-49-8401

SPECIFY CATALOG NO. AND SERIAL NO. WHEN ORDERING PARTS		REVISED BULLETIN	DATE
PACKOUT™ Tool Boxes			Sept. 2022
CATALOG NO.	SERIAL NUMBER	WIRING INSTRUCTION	


48-22-8425	PACKOUT™ Large Tool Box	Page 1
48-22-8424	PACKOUT™ Medium Tool Box	Page 2
48-22-8450	PACKOUT™ Tool Box	Page 3
48-22-8422	PACKOUT™ Compact Tool Box	Page 4
48-22-8429	PACKOUT™ XL Tool Box	Page 5

EXAMPLE:
Component Parts (Small #) Are Included
When Ordering The Assembly (Large #).

48-22-8425 PACKOUT™ (Large) Tool Box

FIG.	PART NO.	DESCRIPTION OF PART
1	43-62-8425	Top Handle Service Kit
2	-----	Pin
3	43-62-8424	Side Handle Service Kit
4	-----	Pin
5	44-20-8400	Latch Service Assembly (Set of 2)
6	31-01-8400	Storage Tray
7	43-44-8400	Lid Gasket (Not Shown)

NO. REQ.
(1)
(2)
(1)
(2)
(1)
(1)
(1)

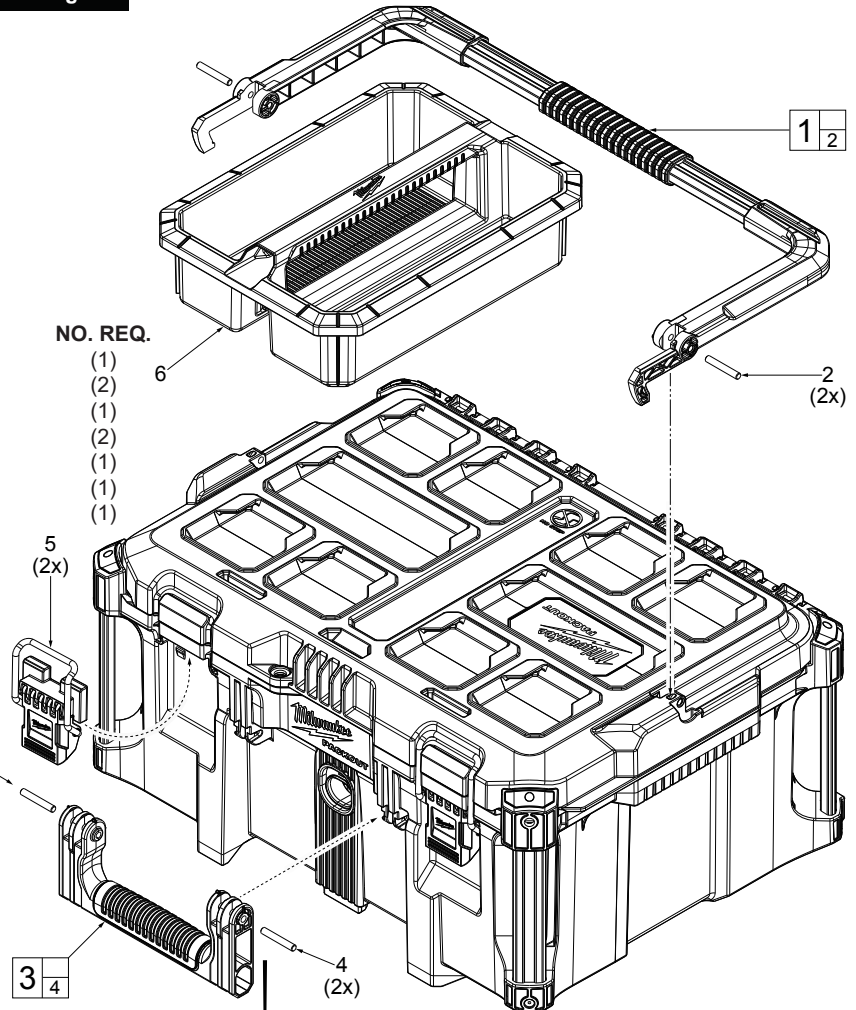


Pins to be installed from the
inside of the handle.



As an aid to removing a damaged Latch Assembly, use two large flat blade screwdrivers. Push blades between parts as shown. Twist both screwdrivers at same time to force the blades into opening and work the latch assembly over the two locking tabs.

To install a new latch assembly, position entire latch assembly over locking tabs with the two top lugs partially inserted in 'catch cavity' of main housing. Engage latch bar onto lid and gently press latch lever to slide assembly over two locking tabs and into place.

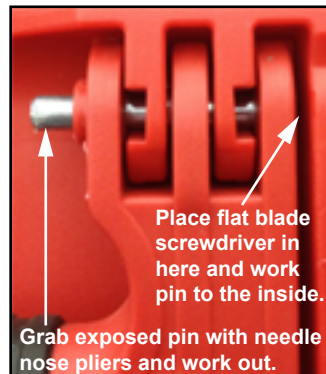

Place flat blade
screwdriver in
here and work
pin to the inside.

Grab exposed pin with needle
nose pliers and work out.

This removal and installation process will be the same where other service latches are offered in this system.