


ITEM NO.	PART NO.	NO. USED	DESCRIPTION	SUPPLY Q'TY	ITEM NO.	PART NO.	NO. USED	DESCRIPTION	SUPPLY Q'TY
1	930515	1	Chuck Wrench		28	608VVM	1	Ball Bearing 608VVMC2EPS2L	
2	*	1	Drill Chuck (includes Item 1)		29	932642	2	Rivet D2.5×2.8	
3	*	1	Spindle		30	—	1	Nameplate	
4	939556	1	Retaining Ring D35	10	31	961781	2	Brush Cap	
5	6202VV	1	Ball Bearing 6202VVMCPS2S		32	981612Z	2	Auto Stop Carbon Brush	2
6	939544	1	Retaining Ring D15	10	33	981586	2	Brush Holder	
7	957725	2	Tapping Screw D5×70		34	981560	1	Housing Assembly (includes Item 33, 45)	
8	949454	4	Spring Washer D5	10	35	981373	2	Tube (D)	
9	981650	1	Gear Cover		36	956633	1	Side Handle	
10	983448	1	Final Gear		37	956384	5	Tapping Screw D4×20	
11	627VVM	1	Ball Bearing 627VVMC2EPS2S		38	949423	7	Washer D4	10
12	981652Z	1	Second Pinion		39	930886	1	Handle Joint	
13	949426	1	Washer D8	10	40	981661	1	Handle Cover	
14	609VVM	1	Ball Bearing 609VVMC2PS2S		41	981655Z	1	Depth Stopper	
15	982791	1	Inner Cover Assembly (includes Item 14, 16, 17)		42	981663P	1	Reversing Switch Assembly (includes Item 43)	
16	608VVM	1	Ball Bearing 608VVMC2EPS2L		43	930703	2	Brush Terminal	
17	971657	1	Washer		44	957747	1	Switch	
19	981657C	1	Armature		45	949365	2	Set Screw M4×5	10
20	981562	1	Fan Guide		46	957561	1	HITACH Label	
21	931875	2	Tapping Screw D5×35		48	960266	1	Cord Clip	
22	981563	2	Rubber Packing		49	954004	2	Tapping Screw D4×16	
23	981561	2	Tapping Screw D5×60		53	982805Z	1	Pillar Terminal	
24	981656C	1	Stator Assembly (includes Item 25, 35)		54	953327	1	Cord Armor	
25	960356	1	Terminal (A)		55	500240Z	1	Cord	
26	956387	1	Dust Seal (A)		56	986153	1	Internal Wire 90L	
27	946362	1	Bearing Lock		57	986154	1	Internal Wire 200L	
					58	*	1	Special Screw	


SERVICE CHANGE:

1. Change on Drill Chuck and Spindle:

TYPE 1



TYPE 2

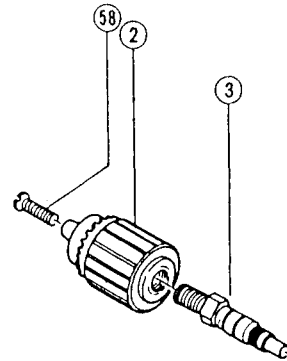

Item No.	Description	Type 1 (till Dec., 1981)	Type 2 (since Jan., 1982)
2	Drill Chuck	Part #950274	Part #950275
3	Spindle	Part #981651Z	Part #981667
58	Special Screw	————	Part #981122

The above parts are completely interchangeable as a set.